

PAIN T ARRESTANCE FILTER TEST REPORT

Spray Removal Efficiency & Paint Holding Capacity

Tested for: **Paint Pockets® Company**
Filter Mfr.: **Paint Pockets® Company**
Filter Name/Model: **PP Series (PP****)**
Report#./Test#: **R 042 T 079**
Report Date: **Jan. 8, 1997**

Test Information

FILTER DESCRIPTION:

Two layers, stiff poly w/large voids on soft poly pa

PAINT DESCRIPTION:

High Solids Baking Enamel (S.W. Permaclad 2400, red

PAINT SPRAY METHOD:

Conventional Air Gun at 40 PSI

SPRAY FEED RATE:

140 gr./min. **130** cc./min.

AIR VELOCITY:

150 FPM

Test Results

INITIAL PRESSURE DROP of Clean Test Filter

0.08 in. water

FINAL PRESSURE DROP of Loaded Test Filter

0.30 in. water

WEIGHT GAIN on TEST FILTER & Test Frame Trough

4340 grams

PAINT HOLDING CAPACITY of TEST FILTER

3125 grams = **6.9** lbs.

PAINT RUN-OFF





1215 grams

WEIGHT GAIN - FINAL FILTER

6.9 grams = **PENETRATION**

AVERAGE REMOVAL EFFICIENCY of TEST FILTER

99.84 %

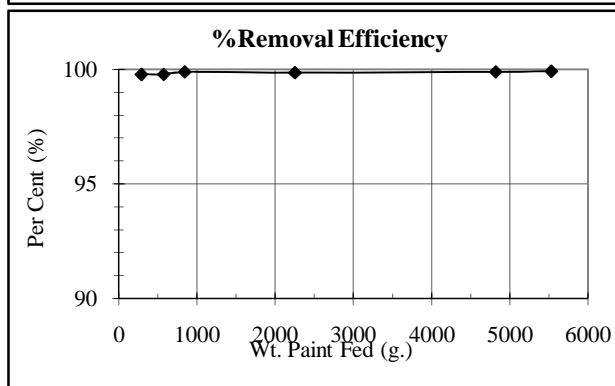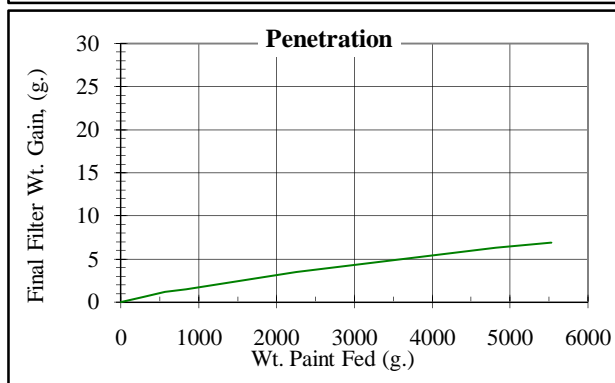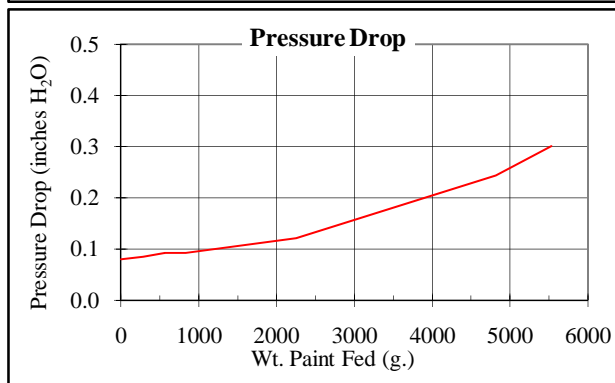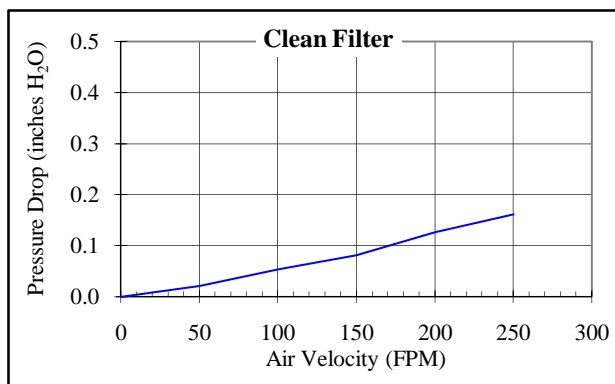

Test Engineer: P. Tuzinski

Supervising Engineer: K. C. Kwok, Ph.D.